

SuperAP® 600 DR 630 mW Rugged AP/Bridge

Dual Radio Wi-Fi with Tamper and Weather Resistant Case

ValuePoint™ Networks high speed (54Mbps) 802.11a/b/g based SuperAP 600 DR is designed for distributed Wi-Fi deployment in a hotel, apartment building, airport, or other public venue. It is an extremely **Rugged Access Point, with two (2) Radios with up to 630 mW transmit output each.** Ideal for indoor or outdoor applications where industrial hardened equipment is required, we use a NEMA style enclosure, lockable to the wall or ceiling. The SuperAP 600 DR can act as an Access Point, Bridge repeater, or combination Access Point and Bridge repeater. Pricing for the 600 DR is more cost effective than ever before, dramatically lowering your infrastructure costs, and increasing your Return on Investment.



Hardware Features

The SuperAP 600 DR comes with two (2) industry standard female N-bulkhead connectors so you can use a wide assortment of the best antennas available. Your backbone Ethernet cable connects to the AP through a moisture-proof gland and the entire unit is sealed with a heavy-duty gasket. The unit is entirely sealed from the harshest elements outdoors, tampering indoors, and is suitable for all applications.

Each radio on the 600 DR is separately adjustable up to 630 mW output with its own channel setting, SSID, and encryption. The Dual Radio configuration is especially useful when attached to directional antennas to extend network range or act as a wireless repeater.

The SuperAP 600 DR supports IEEE 802.3af 48Volt Power over Ethernet. It uses external replaceable antennas as well as Transmit Power control, enabling it to be used in a wide variety of special applications where the wireless output needs to be controlled for the environment. Special high-gain, omni-directional, directional, or Yagi antennas can be attached to the unit using standard N-type cabling.



User Authentication

Secure authentication based on industry standards

The 600 DR incorporates 802.1x/Radius-based authentication features that interoperate with a back-office Radius server to provide authentication of each user. Radius-based authentication means a SuperAP 600 DR is compatible with a wide variety of shared usage and public access applications. In addition, the 600 DR can authenticate users based on their MAC address if desired.

Security and Management

Highly secure and manageable

In addition to Radius-based and MAC-based authentication in the Advanced Version, the 600 DR supports the 64-bit and 128-bit Wireless Encryption Protocol (WEP), Wireless Protected Access (WPA), Static WPA-PSK, WPA2-PSK and disabling of SSID broadcast. Specific packet filtering by Ethernet type, protocol, or port is also supported.

The 600 DR is easy for administrators to setup through Web-based management, or our Windows-based network manager. Additionally, management can be done via SNMP v1, v2c, 802.1x and 802.1d MIBs. It is UPnP-enabled and supports remote firmware upgrades via TFTP or HTTP file-based upload.

Extended Network Range

Repeater functionality

The 600 DR is able to operate as a repeater in addition to an access point, allowing it to communicate with other compatible AP/routers to form a Wireless Distribution System. This greatly extends the reach of the wireless network. Using directional antennas and the unit's powerful 630 mW radios, a range of several miles is possible. Up to six WDS links can be established from a single unit.

Compatibility

Wi-Fi

The 600 DR is fully compatible with the Wi-Fi standard, ensures the usability with any Wi-Fi compatible wireless equipped device. Wi-Fi is the fastest growing standard for Internet access and is supported on a vast number of PCs today


About ValuePoint Networks

ValuePoint Networks is the foremost manufacturer of price leading Gateway Controllers, Rugged Access Points, and outdoor Mesh gear.

ValuePoint products are used in Hospitality, MTU/MDU, industrial, WISP, outdoor, hotspot, municipal, and enterprise applications. Using ValuePoint gear, you can light up more for less, reduce your capital expenditures, and improve your Return on Investment.

www.valuepointnet.com

Dual Radio Usage Scenarios

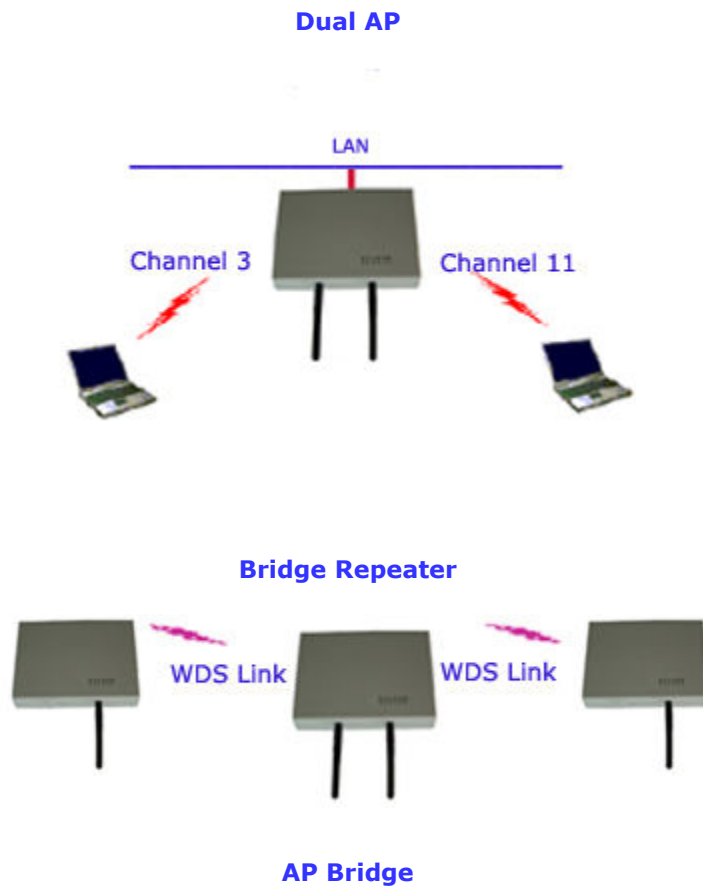



Technical Specifications

Wireless – Each Radio

- IEEE 802.11a/b/g
- Frequency band: 2.4-2.4835GHz, 5.8GHz
- Modulation Techniques: DSSS (OFDM, CCK, DQPSK, DBPSK)
- Data Rates: OFDM@54Mbps, CCK@11/5.5Mbps, QPSK@2Mbps and DBSK@1Mbps
- Media Access Protocol: CSMA/CA with ACK, RTS/CTS
- Access Point Range: 1500 meters line of sight (client dependent)
- WDS Repeater Range: 7,500 meters line of sight (antenna dependent)
- 630 mW peak transmit power with Transmit Power Control
- OFDM Sensitivity: -74dBm @54Mbps ~ -84dBm@12Mbps
- CCK Sensitivity: -74dBm @11Mbps ~ -92dBm@1Mbps

Networking

- IEEE 802.3u 10/100BaseTX for Ethernet LAN
- DHCP Client and Server
- Static DHCP mappings
- 802.1d Bridging functionality
- UPnP
- Up to 6 WDS Repeater links per radio, 12 total

Security

- 802.1x RADIUS based security
- MAC based access control
- 64/128 bit RC4 WEP
- WPA, WPA-PSK(TKIP, AES)

Management

- Web-based management
- System logging
- SNMP v1/v2

- MIB II with traps, 802.1x, 802.1d MIBs

Interfaces

- 1 10/100M Ethernet LAN port

Compatibility

- Works with any Wi-Fi certified interfaces

Operating Environment

- Operating Temperature: -20 to 70 C
- Humidity: Max. 95% non-condensing
- 10.8 x 8.3 x 4 In. / 3.6 Lbs.

Electrical

- 48 Volt Power Over Ethernet (PoE 1 or SuperMesh required)
- AC: Input: 100 – 240 VAC, 50/60 Hz, 0.35A; Output: 12V, 1A

Regulatory Approvals

- FCC part 15 Class B, VCCI Class B, CE Mark, UL

Advanced Features

- AP load balancing
- Wireless Client Isolation
- Association Control
- Distance Setting (ACK Timeout)
- Maximum of 4 SSIDs per radio

Warranty

- One year parts and labor
- 30 day satisfaction guaranteed